

06/14/99
Jc672 U.S. PTO

A

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. PA18-99

First Inventor or Application Identifier BERNARD MERRITT

Title MOTORIZED FOLDING BED

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 15]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT: IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☒ * Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	LEONARD WEISS				
Address	2300 WEST SAHARA AVENUE, #34				
City	LAS VEGAS	State	NEVADA	Zip Code	89102
Country		Telephone		Fax	

Name (Print/Type)	LEONARD WEISS	Registration No. (Attorney/Agent)	26246
Signature		Date	6/9/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(b))--INDEPENDENT INVENTOR**

Docket Number (Optional)

PA18-99

Applicant, Patentee, or Identifier: Bernard Merritt

Application or Patent No.: _____

Filed or Issued: _____

Title: Motorized Folding Bed

As a below named inventor, I hereby state that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
- ☐ the application identified above.
- ☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
- ☐ Each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern, or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Bernard Merritt

NAME OF INVENTOR

NAME OF INVENTOR

NAME OF INVENTOR


 Signature of inventor

Signature of inventor

Signature of inventor

Date

Date

Date

MOTORIZED FOLDING BED

BACKGROUND OF THE INVENTION

Field of Invention: This invention relates to beds, and more particularly, is a folding bed that is alternatively raised and lowered in response to an operation of a switch.

Description of the Prior Art: A folding bed, often referred to as a Murphy bed, is usually comprised of a frame that supports a foundation and mattress. The folding bed is moveable from a vertical raised storage position to a horizontal lowered functional position and vice versa.

When in the raised position, the folding bed usually is disposed within an alcove of a wall or within a storage cabinet where it is concealed. In the lowered position, the folding bed appears to be a piece of furniture without extraordinary features. The folding bed is frequently used in an environment, such as an apartment, where floor space may be marginally sufficient for a resident.

It should be understood that the weight of the folding bed is considerable. Because of the weight, counterbalancing springs are used to reduce the effort needed to raise and lower the folding bed. However for an elderly or handicapped individual, almost any effort is enervating. Accordingly, it is desirable to provide a motorized folding bed that obviates the effort.

The motorized folding beds of the prior art are cumbersome and expensive to produce. U. S. Patent 3,517,397 of Moore, for

example, discloses a folding bed that is raised and lowered by a motor that rotates a lead screw. The head of the '397 bed is coupled to a pair of guide tracks by guide members that are slidable within the tracks.

5 U. S. Patent 4,449,263 discloses a motor bolted to a floor near the center of the foot of a folding bed. The motor is connected to a reciprocal drive arm that rotates the '263 bed about a pivot pin. Counterbalancing springs reduce the amount of force needed to rotate the '263 bed.

10 All folding beds of the prior art are comprised of a structural arrangement where raising and lowering creates friction between either two or more moveable structures or a moveable structure and a stationary structure. The friction is a source of undesired wear. There is a need for a motorized folding bed that
15 is simple, reliable and inexpensive to produce and is a structure of a type that obviates excessive undesired wear.

SUMMARY OF THE INVENTION

20 An object of the present invention is to provide a frame of a folding bed that is alternatively raised from a lowered functional position and lowered from a raised storage position in response to an operation of a momentary switch.

25 According to the present invention, a motor is operable to cause a rotation of a frame of a folding bed about an axis of rotation.

In one specific embodiment, the motor is included in a

rotatable power assembly that has an axis of rotation that is displaced from the axis of rotation of the frame. A threaded shaft is coupled to the motor. The threaded shaft engages threads within a sheath that is connected to the frame at a datum location whereby a rotation of the frame to either the raised storage or the lowered functional position causes a related rotation of the motor and all other components of the power assembly. The frame is raised in response to a distance between axis of rotation of the power assembly and the datum location being increased. The frame is lowered from a raised storage position in response to the distance being decreased. The distance is changed in response to a rotation of a threaded shaft.

The invention is a motorized folding bed that is simpler than motorized folding beds of the prior art. Additionally, in the event of a power failure, the folding bed is easily either raised or lowered manually.

Other objects, features, and advantages of the invention should be apparent from the following description of the preferred embodiment thereof as illustrated in the accompanying drawing.

BRIEF DESCRIPTION OF THE DRAWING

fig. 1 is a perspective view of a first embodiment of the present invention;

fig. 2 is a section of fig. 1 taken along the line 2-2 when a folding bed of fig. 1 is in a raised position;

fig. 3 is a section of fig. 1 taken along the line 2-2 when a

folding bed of fig. 1 is in a lowered position;

fig. 4 is a plan view of a chain and sprocket arrangement in the embodiment of fig. 1;

fig. 5 is a plan view of an alternative to the chain and sprocket arrangement of fig. 4;

fig. 6 is a perspective view of a second embodiment of the present invention;

fig. 7 is a side elevation of a motor and gear box in the embodiment of fig. 6;

fig. 8 is a front elevation of the motor and gear box of fig. 7; and

fig. 9 is a section of fig. 6 taken along the line 9-9.

DESCRIPTION OF THE EMBODIMENTS

As shown in figs. 1-3, a folding bed includes a frame 10 (fig. 1) and a base 12. The frame 10 is shown in solid lines in a raised storage position and in broken lines in a lowered functional position. As explained hereinafter, the frame 10 is rotatable from the lowered position to the raised position and vice versa. The base 12 is stationary.

The frame 10 includes a transverse member 14 having a T shaped cross-section. The member 14 is the head of the folding bed. Surfaces 16, 18 (figs. 2 and 3) of the member 14 are fixedly connected in any suitable manner to a cylindrical positioning shaft 20.

Preferably, the base 12 is secured to a wall within an alcove

via L shaped brackets (not shown). Alternatively, the base 12 is secured to a wall of a storage cabinet. The use of the L shaped brackets obviates bolting the base 12 to a floor in accordance with the prior art.

5 The base 12 includes a horizontal panel 22 having ends that are integrally connected to similar vertical panels 24, 26. The panel 24 has a hole 28 therethrough wherein bearings are retained by a pillow block 30. An end 32 of the shaft 20 (fig. 1 is journalled within the pillow block 30.

10 The panel 26 has a hole 34 therethrough wherein bearings are retained by a pillow block 36 that is similar to the pillow block 30. An end 38 of the shaft 20 is journalled within the pillow block 36.

15 As best shown in fig. 4, the end 38 extends from the pillow block 36 (fig. 1). A sprocket 40 is fixedly mounted on the end 38. Hence, when the sprocket 40 rotates, the shaft 20 and the frame 10 correspondingly rotate. Accordingly, the frame 10 is rotatable about the axis of the shaft 20.

20 A motor 42 (fig. 1) is seated within brackets 44 that are fixedly connected to the panel 22. The motor 42 is connected to an electrical power source (not shown) via a power cord 43 and a switch (not shown). Preferably the motor 42 is of a type that provides a motor shaft velocity comparable to a desired velocity of the raising and the lowering of the frame 10.

25 The switch has a push button that is manually depressed to cause a shaft 46 of the motor 42 to alternatively rotate in a

clockwise or counterclockwise direction. When the switch is not depressed, the shaft 46 does not rotate. The switch is of a type well known to those skilled in the art as a momentary switch.

An end 50 (fig. 4) of the shaft 46 extends through a hole in the panel 26. A sprocket 48 is fixedly mounted on the end 50. The sprocket 48 has a smaller diameter than the sprocket 40.

A chain loop 51 engages the sprockets 40, 48. Because the sprocket 48 has a smaller diameter than the sprocket 40, a greater amount of torque is available at the shaft 20 than at the shaft 46. Moreover, since the motor 42 is operable to rotate either clockwise or counter clockwise, the switch is operable to cause the raising or the lowering of the frame 10.

Preferably, a plurality of counterbalancing springs 52 are connected to the base 12 and the member 14. More particularly, the base 12 includes a transverse strip 54 that is integrally connected to the panel 22. The strip 54 has a plurality of holes 56 evenly spaced along its length. The strip 54 extends lengthwise between the panels 24, 26 and is perpendicular to the panel 22.

The member 14 has a plurality of holes therethrough, similar to the holes 56. The holes through the member 14 include a portion of an exemplary hole 58 (figs. 3 and 4). The holes 56 include a portion of an exemplary hole 56E. Ends 60, 62 of one of the springs 52 are respectively retained within the holes 56E, 58.

All others of the springs 52 are connected to the member 14 and the strip 54 in a similar manner.

When the frame 10 is in the raised position, the springs 52

are relaxed. As the frame 10 is rotated from the raised position, tension in the springs 52 increases. Hence, tension in the springs 52 is a maximum when the frame 10 is in the lowered position.

Because of the springs 52, when the frame 10 is in the lowered position, the frame 10 is urged by the springs 52 towards the raised position. When the frame 10 is rotated from the raised position, the weight of the frame 10, a foundation and a mattress thereon urge the frame 10 towards the lowered position. Therefore, in the event of a power failure, the frame 10 is easily raised and lowered manually.

As shown in fig. 5, in an alternative embodiment, the motor 42 is mounted upon an extension 22A of the base 22. A worm gear 64 is fixedly mounted on the shaft 46. A spur gear 66 is mounted on the end 38. The worm gear 64 engages the gear 66, whereby rotation of the worm gear 64 causes the raising and lowering of the frame 10.

The frame 10 (fig. 1), a type of structure that is well known in the art, includes a longitudinal member 68 that has an L shaped cross-section. The member 68 has an end 70 that is integrally connected to the member 14. Additionally, the member 68 has an end 72 that is integrally connected perpendicularly to a transverse member 74 at an end 76 thereof. The member 74 has the L shaped cross-section.

Similarly, the frame 10 includes a longitudinal member 78 that has the L shaped cross-section. The member 78 has an end 80 that is integrally connected to the member 14. Additionally, the member 78 has an end 82 that is integrally connected perpendicularly to

the member 74 at an end 84 thereof. The member 78 is parallel to the member 68. The member 74 is the foot of the folding bed.

A support strip 86 is pivotally connected to the member 78 by a pivot pin 88 proximal to the member 74. Similarly, a support strip 90 is pivotally connected to the member 68 by a pivot pin 92 proximal to the member 74.

When the frame 10 is in the raised position, the strips 86, 90 are pivoted to positions parallel to the members 68, 78. When the frame 10 is in the lowered position, the strips 86, 90 are pivoted to positions that support the frame 10.

The frame 10 additionally includes transverse support members 92, 94 that are integrally connected to the members 68, 78. The members 92, 94 are elements that support the foundation and the mattress when they are placed upon the frame 10.

As shown in figs. 6-8, in a second embodiment of the present invention, a power assembly 96 includes a threaded shaft 98 having one end coupled through gears in a gear box 100 to a shaft (not shown) of a motor 102. A rotation of the shaft of the motor 102 causes a corresponding rotation of the threaded shaft 98.

The motor 102 is connected to an electrical power source (not shown) via a power cord 103 and a momentary switch (not shown) of a type described in connection with the first embodiment. Hence, the shaft of the motor 102 is alternatively rotatable in a clockwise and a counterclockwise direction.

The assembly 96 additionally includes a support block 104 that is fixedly connected to bottom surface 106 of the gear box 100.

The support block 104 has a cylindrical hole 108 therethrough. A cylindrical shaft 110 that is coaxially disposed within the hole 108 is fixedly connected therein to the block 104. As explained hereinafter, the axis 111 of the shaft 110 is an axis of rotation of the assembly 96.

Brackets 112, 114 have holes 116, 118 respectively therethrough. Bearings are maintained within the hole 116 by a pillow block (not shown). In a similar manner, bearings are maintained within the hole 118. The brackets 112, 114 are mounted upon the panel 22.

The shaft 110 has ends 120, 122 that are journaled within the holes 116, 118, respectively. Therefore, the shaft 110 is rotatable within the holes 116, 118. Since the shaft 110 is fixedly connected to the block 104, the assembly 96 is rotatable about the axis 111.

As shown in fig. 9, in this embodiment, the frame 10 additionally includes a transverse member 123 substantially midway between the members 92, 94. A bracket 124 is fixedly connected to the member 123 at a datum location 125 approximately midway between the members 68, 78. The purpose of the bracket 124 is described hereinafter.

The threaded shaft 98 engages threads within an internally threaded sheath 126. An end 128 of the sheath 126 is pivotally connected to the bracket 124. Because the threaded shaft 98 is engaged within the sheath 126 and the end 128 is connected to the bracket 124, a rotation of the frame 10 about the axis of the shaft

20 causes a rotation of the assembly 96 about the axis 111.

The use of the threaded shaft 98 to either lower or raise the frame 10 is predicated upon a displacement between the axis of rotation of the frame 10 and the axis 111. Because of the displacement, the distance between the datum location 125 (or any other location on the frame 10) and the axis 111 is least when the frame 10 is in the lowered functional position. The distance is greatest when the frame 10 is in the raised storage position.

Therefore there is a relationship between the distance and the position of the frame 10. This embodiment utilizes the threaded shaft 98 to implement the relationship.

Thus, when the frame 10 is in the lowered functional position, it is raised in response to the distance being increased; the increase is accomplished by the motor 102 rotating threaded shaft 98 in a counter clockwise direction. Conversely, when the frame 10 is in the raised storage position, it is lowered in response to the distance being decreased; the decrease is accomplished by the motor 102 rotating threaded shaft 98 in a clockwise direction.

A transverse strip 130 (figs. 6 and 8) is integrally connected to the panel 22 along an edge 132 thereof. One end of the strip 130 is proximal to the bracket 26; the other end is proximal to the bracket 114. Similarly, a transverse strip 134 is integrally connected to the panel 22 along the edge 132. One end of the strip 134 is proximal to the bracket 26; the other end is proximal to the bracket 112. Hence, there is a separation between the strips 130, 134. The separation prevents contact between the assembly 96 and

the strips 130, 134 when the frame 10 is in the lowered functional position.

The strips 130, 134 have a plurality of holes 136 therethrough. The holes 136 are similar to the holes 56 in the first embodiment. the transverse member 14 has a plurality of holes 138 therethrough similar to the hole 58 in the first embodiment.

Ends of the springs 52 are retained within the holes 136, 138 in a manner similar to the retention of the springs 52 in the first embodiment. Preferably, the lead screw 98 is easily uncoupled from gears in the gear box 100 so that the frame 10 may be raised and lowered manually in the event of a power failure.

While the invention has been particularly shown and described with reference to embodiments thereof, it should be understood by those skilled in the art that changes in form and detail may be made therein without departing from the spirit and scope of the invention.

I CLAIM:

1. A folding bed, comprising:

a frame;

a cylindrical positioning shaft that is fixedly connected to said frame, said frame being rotatable about the axis of said positioning shaft to either a raised storage position or a lowered functional position whereby the axis of said positioning shaft is the axis of rotation of said frame; and

means for rotating said frame about said axis of rotation.

2. The folding bed of claim 1 wherein said means comprises:

a motor; and

coupling means for coupling the shaft of said motor to said positioning shaft.

3. The folding bed of claim 2 wherein said coupling means comprises:

a sprocket that is fixedly mounted on said motor shaft;

a sprocket that is fixedly mounted on said positioning shaft;

and

a chain loop that engages said sprockets.

4. The folding bed of claim 3 wherein said sprocket mounted on said motor shaft has a smaller diameter than said sprocket mounted on said positioning shaft.

5. The folding bed of claim 2, wherein said coupling means comprises:

a gear that is fixedly mounted on said positioning shaft; and

a gear that is fixedly mounted on said motor shaft that engages said positioning shaft gear.

6. The folding bed of claim 5 wherein said motor shaft gear is a worm gear.

7. The folding bed of claim 1, additionally comprising:

a stationary member; and

a pillow block connected to said stationary member, said positioning shaft being journalled within said pillow block.

8. The bed of claim 7, additionally comprising a coil spring having one end connected to said frame and the other end connected to said stationary member, said spring being relaxed when said frame is in said raised position and in tension when said frame is in said lowered position.

9. The folding bed of claim 1 wherein said means comprises:

a motor;

a threaded shaft;


means for coupling an end of said threaded shaft to the shaft
5 of said motor, said motor and said coupling means being included in
a power assembly that rotatable about an axis that is displaced
from the axis of rotation of said frame;

an internally threaded sheath having an end connected to said
frame at a datum location, said threaded shaft engaging threads of
10 said sheath.

10. The bed of claim 9, additionally comprising a coil spring
having one end connected to said frame and the other end connected
to said stationary member, said spring being relaxed when said
frame is in said raised position and in tension when said frame is
5 in said lowered position.

ABSTRACT OF THE DISCLOSURE

In a first embodiment, a positioning shaft is fixedly connected to a frame of a folding bed. A switch is operable to cause a motor to rotate the positioning shaft in a manner that alternatively causes the frame to rotate to either a raised storage position or a lowered functional position. In a second embodiment, a power assembly and the frame have axes of rotation that are displaced from each other. A motor of the power assembly is coupled to an end of a threaded shaft that engages threads of an internally threaded sheath that is connected to the frame at a datum location. The frame is raised in response to a distance between axis of rotation of the power assembly and the datum location being increased. The frame is lowered in response to the distance being decreased. The distance is changed in response to a rotation of the threaded shaft.

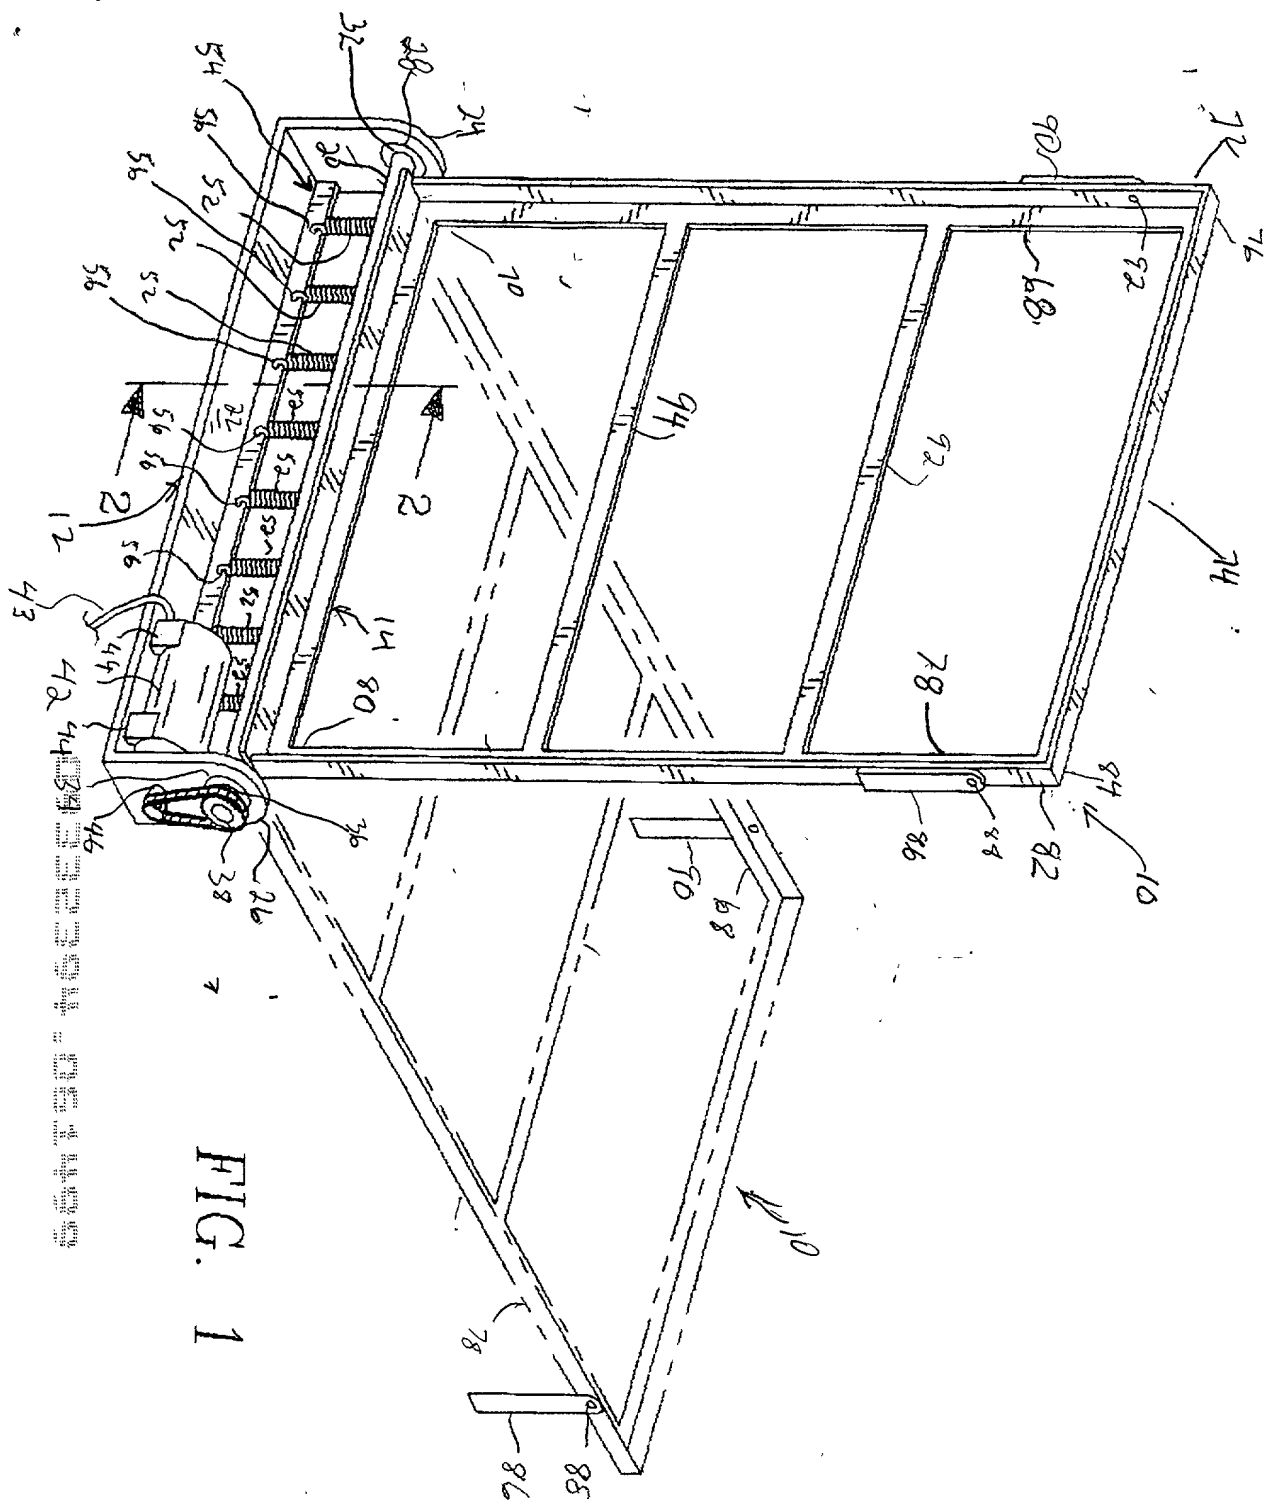

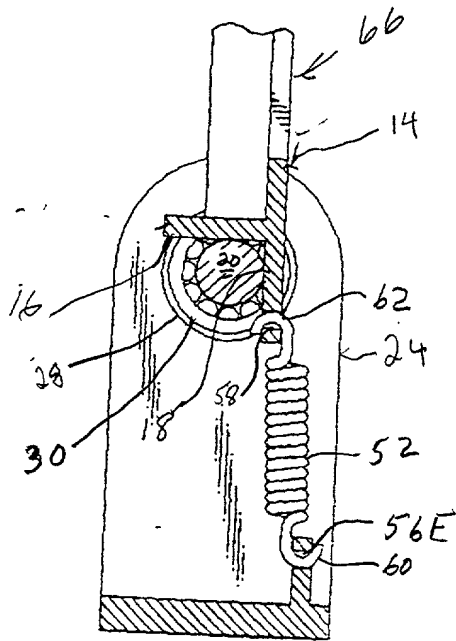


FIG. 2

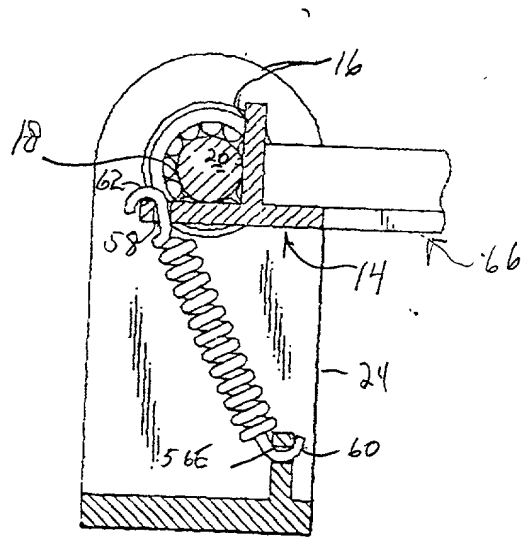


FIG. 3

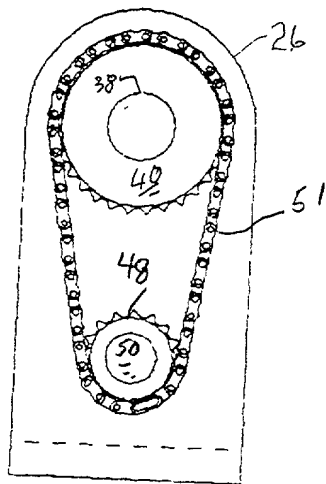


FIG. 4

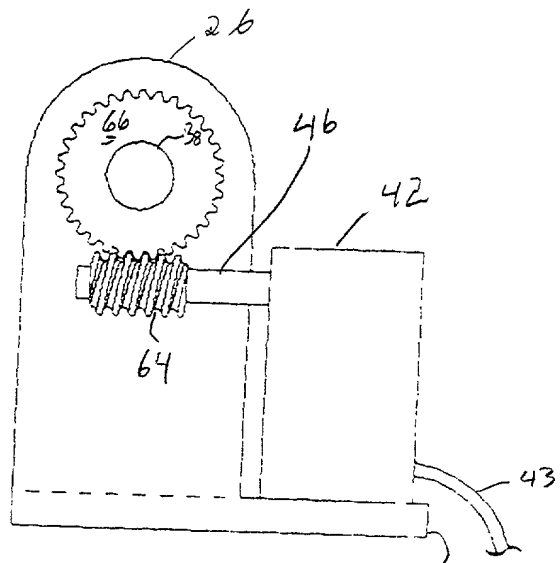


FIG. 5

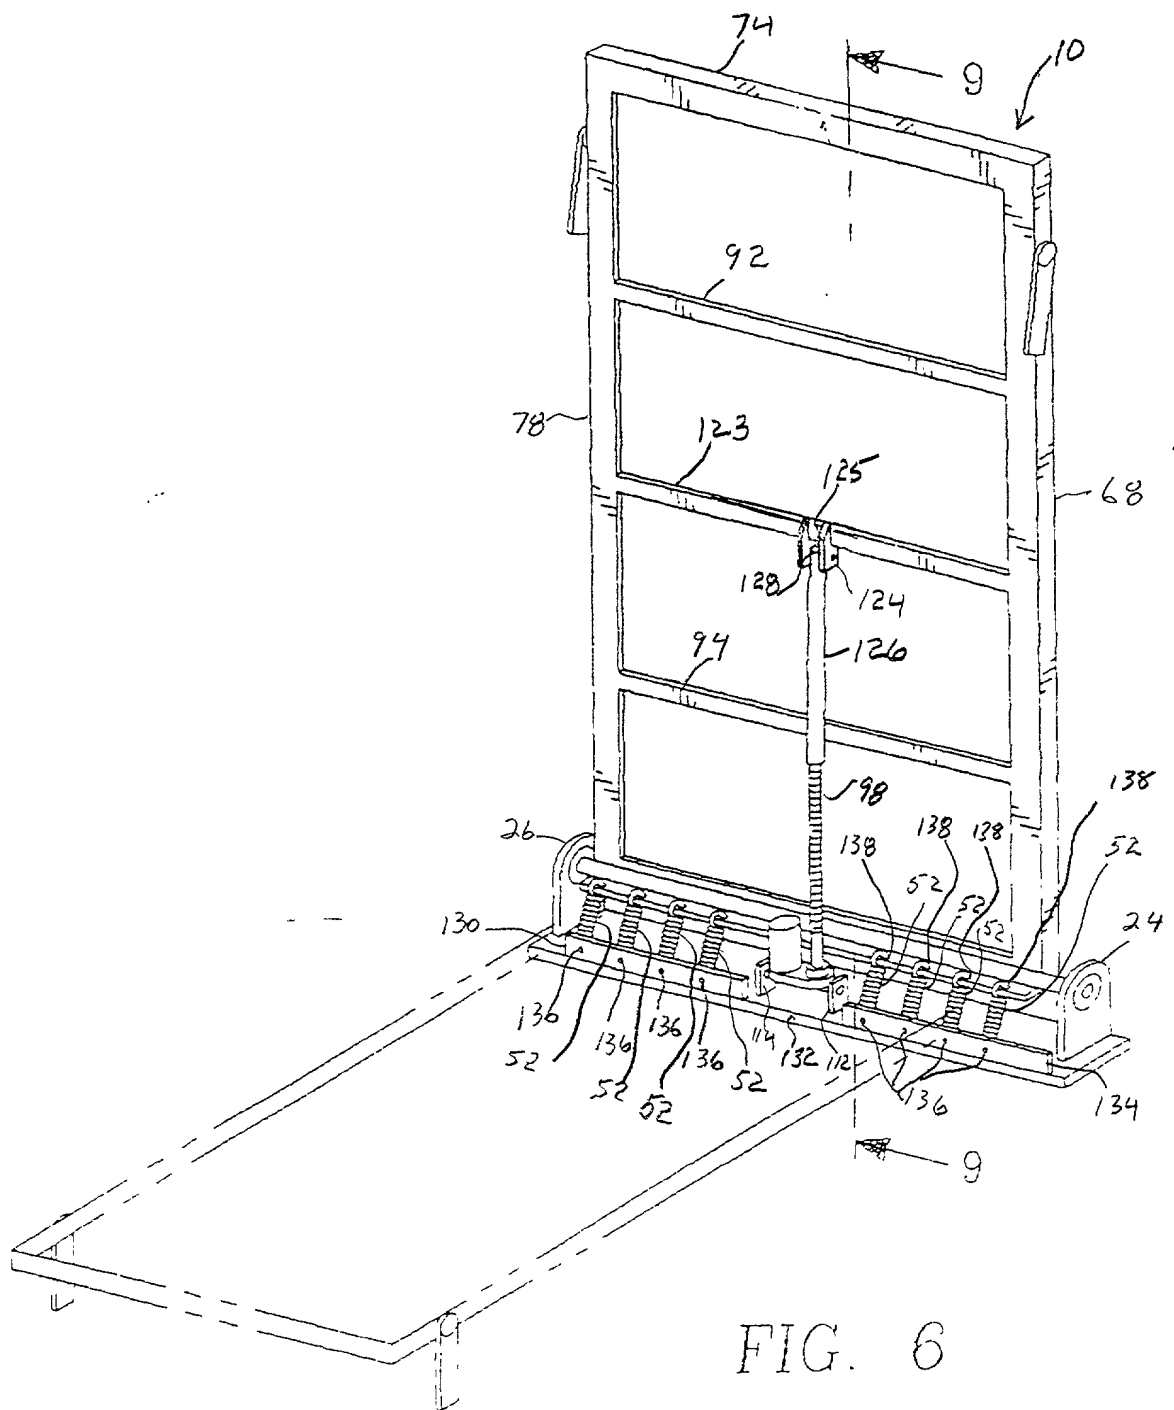


FIG. 6

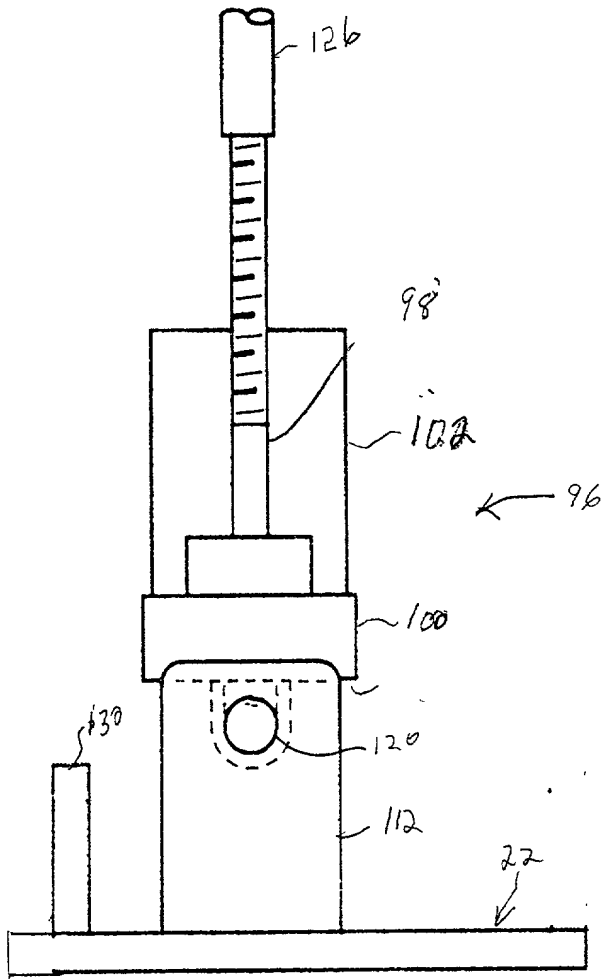


FIG. 7

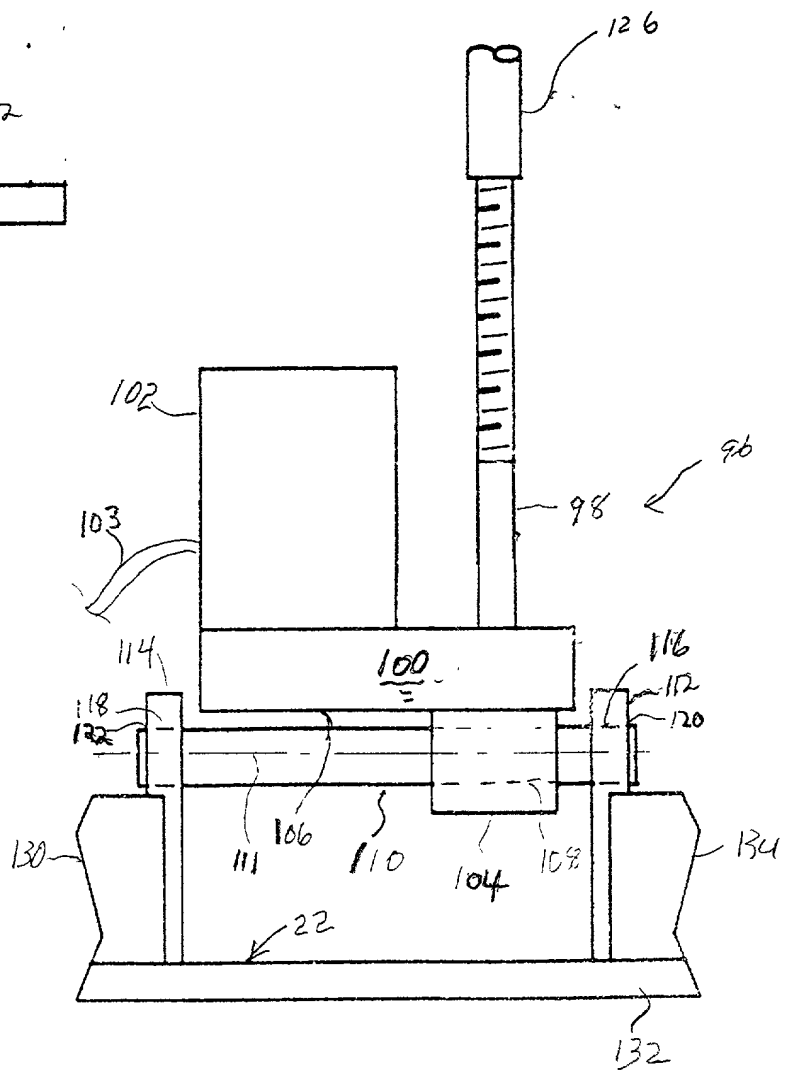


FIG. 8

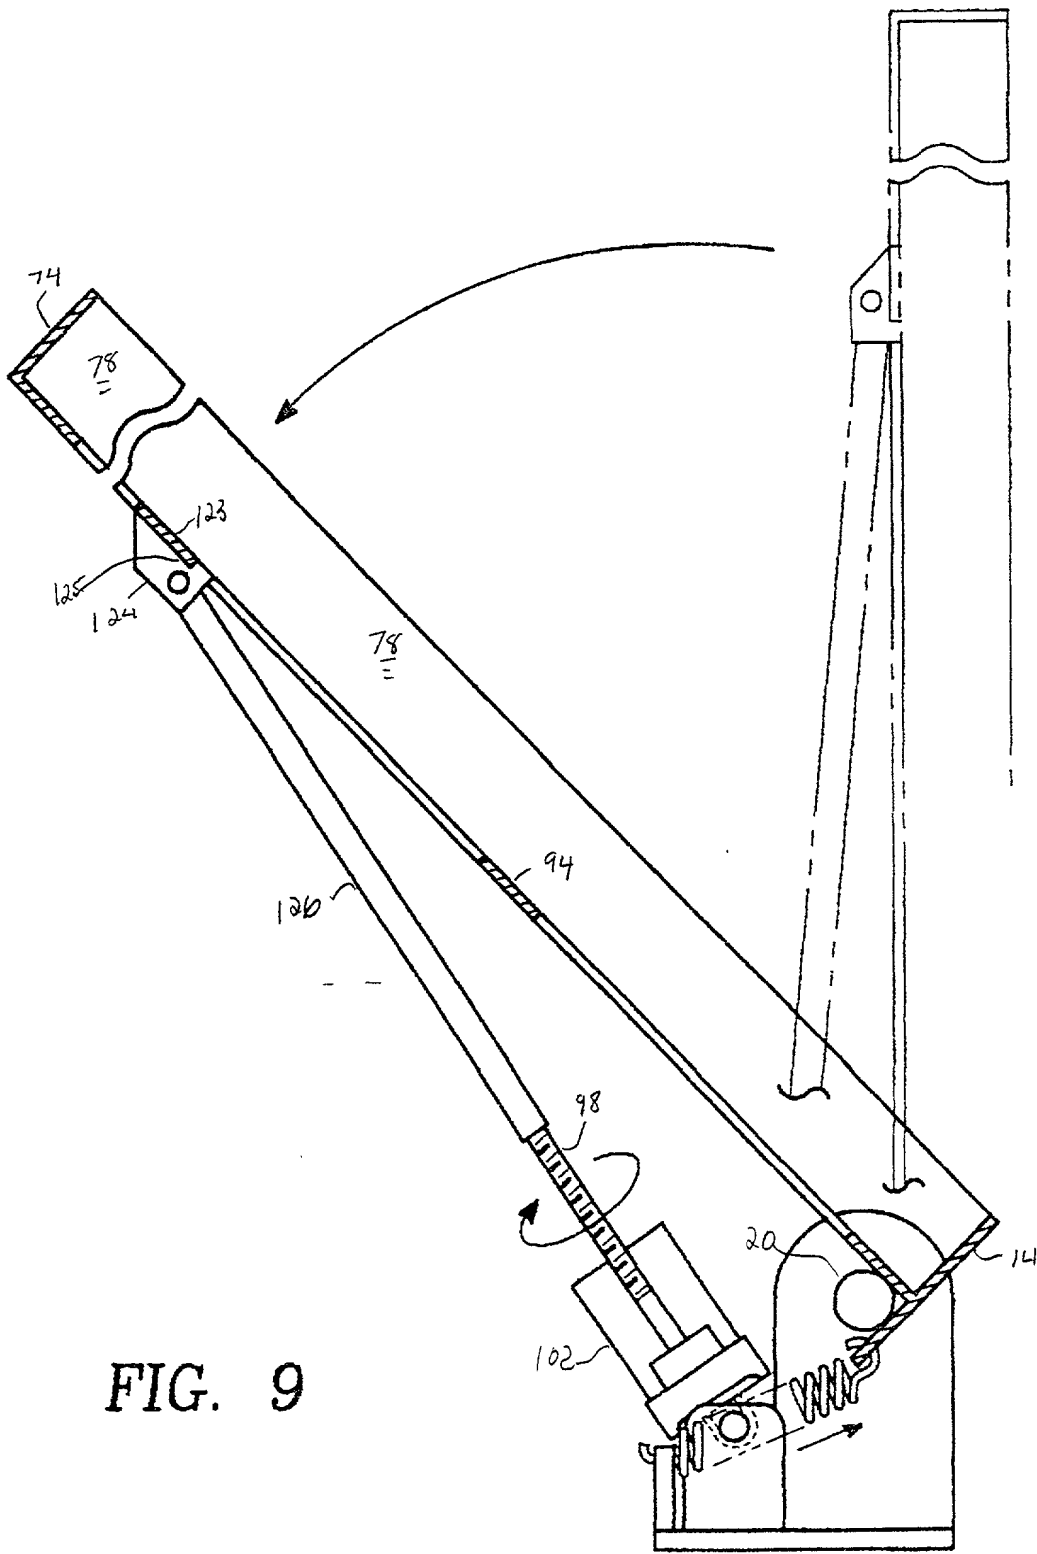


FIG. 9

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	PA18-99
	First Named Inventor	Bernard Merritt
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MOTORIZED FOLDING BED

the specification of which

(Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
LEONARD WEISS	26246		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label


OR ☒ Correspondence address below

Name	LEONARD WEISS				
Address					
Address	2300 WEST SAHARA AVENUE, #34				
City	LAS VEGAS	State	NV	ZIP	89102
Country	US	Telephone	702-933 5505	Fax	702-933 5501

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])		Family Name or Surname	
BERNARD		MERRITT	
Inventor's Signature			Date
Residence: City	LAS VEGAS	State	NV
Country	US	Citizenship	US
Post Office Address	10716 WINDLEDGE AVENUE		
Post Office Address			
City	LAS VEGAS	State	NV
ZIP	89134	Country	US

☐ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto